

BFM FITTINGS

Safely replace your fittings in less than 40 seconds, without tools!



+ Advantages

- Perfectly waterproof
- Hygienic and no dead zones
- Food grade Polyurethane (other materials on request)
- Easy to replace
- Diameters from 100 to 650 mm

Flexible to fit all your needs

On traditional flexible sleeves mounted with hose clamps, a product retention zone is created between the flexible connection and the rigid tubing on which the hose clamp rests. This can be critical in food and pharmaceutical processes. The BFM design prevents the emergence of this dead zone.

Clean, easy and safe to operate

The fitting is tight even on very fine powders. This keeps your production environment clean and limits the risk of creating hazardous areas. The attachment of the flexible sleeve resists the pressure shocks observed during a dust explosion.


Each tubing diameter corresponds to a single sleeve size. This makes it very easy for maintenance teams to supply the right sleeve without having to go through a prior verification or adaptation phase on the industrial installation.

The flexible connection consists of:

- 2 rigid tubes (in stainless steel or steel) to be welded to the two parts of the process to receive the soft cuff. These tubings are equipped with original, patented profiles, adapted to the cuff.
- 1 flexible cuff with spring steel strips molded into the elastomer of the cuff at both ends.

+ Dimensions

Internal diameter D (mm)	Length LM (mm)
100	150
150	150
200	200
250	200
300	200
350	200
400	200
450	200
500	200
550	200
600	200
650	200

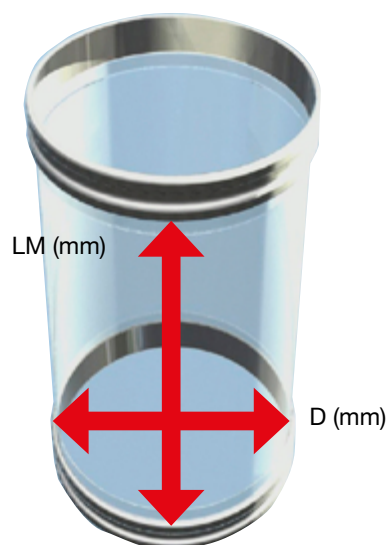

+ Easy & fast installation!

