

## Pneumatic dense phase conveying system for the Cement Industry

<b>Description:</b>	Conveying system over horizontal distances of 120 and 200 metres, with an additional vertical lift of 25 metres.
<b>Client:</b>	ENCI Nederland B.V.
<b>Gericke Technology:</b>	Pneumatic dense phase conveying system type PHFD 5750/D with silo-discharge and product-delivery facilities. Twin pressure vessel (transmitter) arrangement. Gericke type GB minimum wear conveyor pipeline elbows. High pressure product diverter type T.B.
<b>Application:</b>	The conveying of fly ash from storage silos, via a pipe diverter to the cement mills without any dust emissions.
<b>Material conveyed:</b>	Fly ash
<b>Bulk density:</b>	0.6 kg/litre
<b>Particle size, physical properties:</b>	20 to 30 micron. Abrasive and free flowing.
<b>Product source:</b>	Bulk silo
<b>Product destination:</b>	Via receiving silo into cement mills.
<b>Conveying rate:</b>	Mono-transmitter operation 60 tonnes per hour (ca. 100 m <sup>3</sup> /h). Twin-transmitter operation 80 tonnes per hour (ca. 133 m <sup>3</sup> /h).
<b>System requirements:</b>	Low wear conveying utilising minimum air requirements for both mono and twin-transmitter operations.



**This Gericke dense phase conveyor, reduces the air requirements by 45-50 % when compared to other systems. Utilising existing compressors, it was possible to increase the conveying capacity threefold. The low conveying speed reduces wear to an absolute minimum and the unique Gericke pipe-bends allow virtually abrasion-free diversion of the product flow. The Gericke twin-transmitter system ensures maximum conveying efficiency with high output, low air consumption and minimum maintenance.**

# Gericke

Powder Processing Equipment and Systems




Gericke technical staff are available to help you resolve your bulk solids handling requirements and can arrange full scale pilot system trials.

Gericke provide a complete turnkey service for system implementation including all controls, installation and commissioning.

**Legend:**

- 1 Delivery of fly ash
- 2 Silo capacity: 1000 tonnes each
- 3 Product inlet point
- 4 Gericke twin transmitter vessel

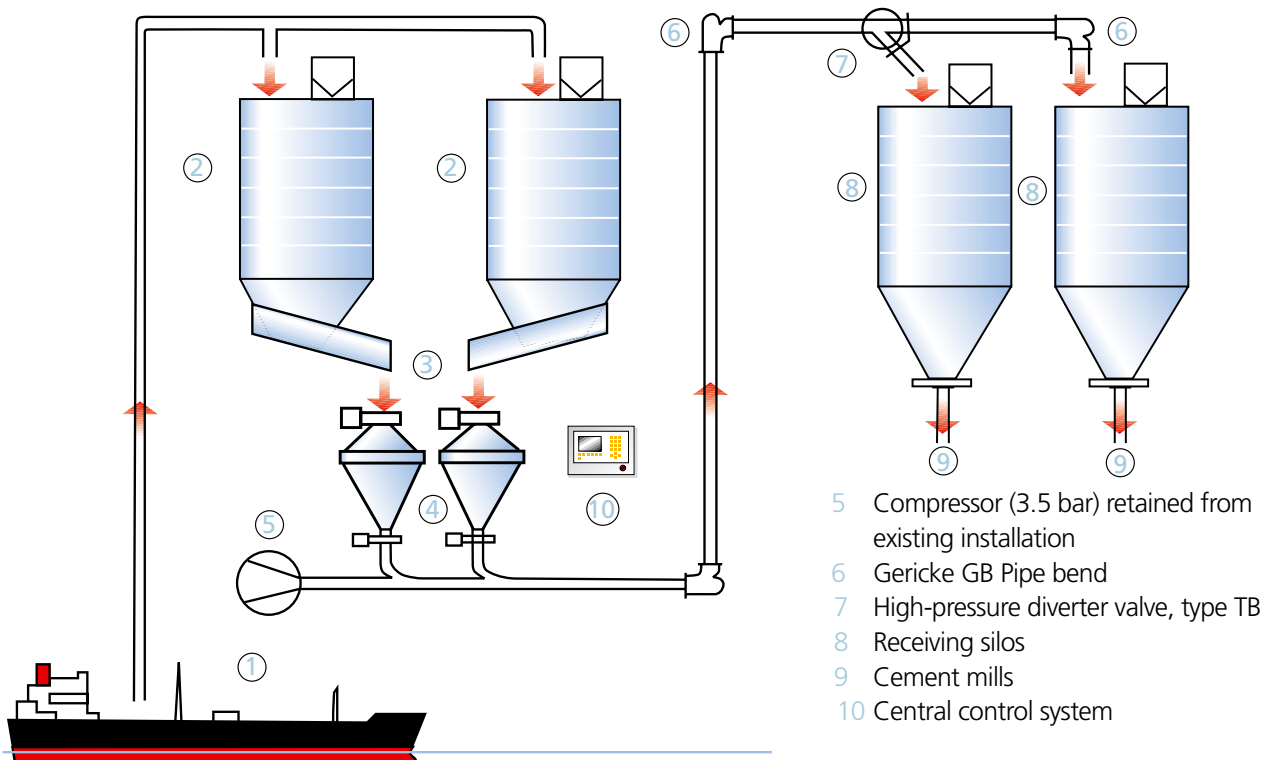

- 5 Compressor (3.5 bar) retained from existing installation
- 6 Gericke GB Pipe bend
- 7 High-pressure diverter valve, type TB
- 8 Receiving silos
- 9 Cement mills
- 10 Central control system

For more information on our other products, services, distributors see:

[www.gericke.net](http://www.gericke.net)

**Gericke representatives:**

**Gericke**

**Powder Processing Equipment and Systems**

**CH-8105** Regensdorf  
Tel. +41 44 871 36 36  
gericke.ch@gericke.net

**DE-78239** Rielasingen  
Tel. +49 7731 929-0  
gericke.de@gericke.net

**FR-95100** Argenteuil  
Tel. +33 1 39 98 29 29  
gericke.fr@gericke.net

**SG-787813** Singapore  
Tel. +65 6452 8133  
gericke.sg@gericke.net

**GB-Ashton-under-Lyne**  
Tel. +44 161 344 1140  
gericke.uk@gericke.net

**NL-3870 CA** Hoewelaken  
Tel. +31 3325 42-100  
gericke.nl@gericke.net

**CN-200020** Shanghai  
Tel. +86 21 538 201 08  
gericke.cn@gericke.net